

## 16bit, 4/8-channel, 250kSPS, SAR ADC

### FEATURES

- 16-bit No Missing Resolution
- Integrated Multiplexer: 4-channel (MS51582N), 8-channel (MS51589N)
- Optical Input Configuration: Unipolar and Bipolar Inputs, Single-ended and Differential Inputs
- INL: +0.5LSB (Typ), ±1.5LSB (Max)
- Dynamic range: 93.8dB
- SINAD (@Reference 2.048V) : 92.5dB(20kHz); THD: -100dB (20kHz)
- Analog Input Range: 0 to VREF (VREF up to VDD)
- Internal Temperature Sensor
- Channel Sequencer
- Single Power Supply: 2.3V to 5.5V, Logical Power Supply: 1.8V to 5.5V
- Serial Interface: Compatible with SPI, MICROWIRE, QSPI and DSP
- Power Dissipation: 3.5mW(2.5V@200kSPS), 12.5mW(5V@200kSPS)
- Standby Current: 50nA

### APPLICATIONS

- Multichannel System Monitoring
- Battery-powered Equipment
- Medical Devices: ECG, EKG
- Mobile Communication: GPS
- Power Line Monitoring
- Data Acquisition
- Seismic Data Acquisition System
- Instrumentation
- Process Control

### PRODUCT DESCRIPTION

The MS51582N/MS51589N is a 4/8-channel, 16bit, charge redistribution successive approximation analog-to-digital converter, which adopts single power supply. The MS51582N/MS51589N is integrated with a 16-bit no missing code SAR ADC internally, a low crosstalk multiplexer, the internal low-drift reference voltage source(2.5V or 4.096V can be selected), a temperature sensor, an optional single-pole filter, and a sequencer that is useful when multiple channels are sequentially sampled.

The MS51582N/MS51589N adopts SPI interface to configure registers and read converted data. SPI interface uses a separate power supply (VIO).



The MS51582N/MS51589N is available in QFN20 package, whose operating temperature range is from -40°C to +125°C.

### PRODUCT SPECIFICATION

Part Number	Package	Marking
MS51582N	QFN20	MS51582
MS51589N	QFN20	MS51589

**TABLE of CONTENTS**

1. FEATURES .....	1
2. PRODUCT SPECIFICATION .....	1
3. APPLICATIONS.....	1
4. PRODUCT SPECIFICATION .....	1
5. TABLE of CONTENTS .....	2
6. PIN CONFIGURATION .....	3
7. PIN DESCRIPTION .....	3
8. BLOCK DIAGRAM .....	6
9. ABSOLUTE MAXIMUM RATINGS .....	7
10. ELECTRICAL CHARACTERISTICS .....	8
11. PACKAGE OUTLINE DIMENSIONS.....	11
12. MARKING and PACKAGING SPECIFICATION.....	12
13. STATEMENT .....	13
14. MOS CIRCUIT OPERATION PRECAUTIONS .....	14

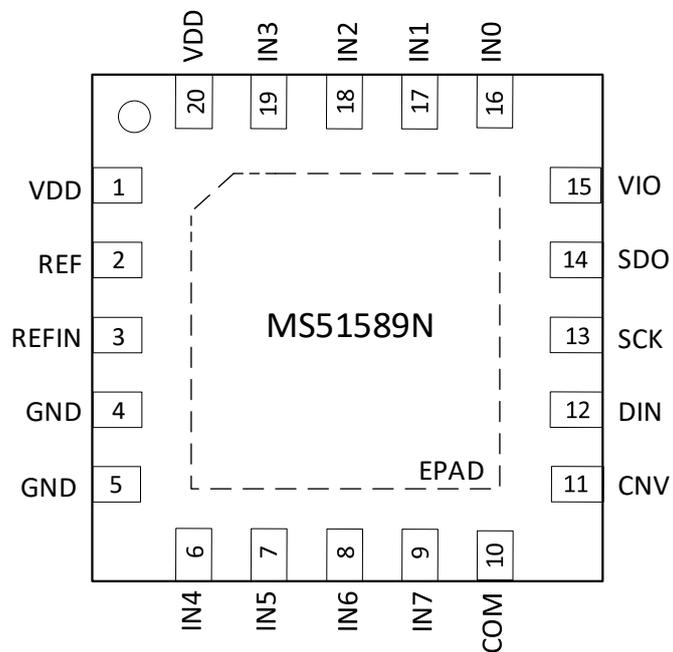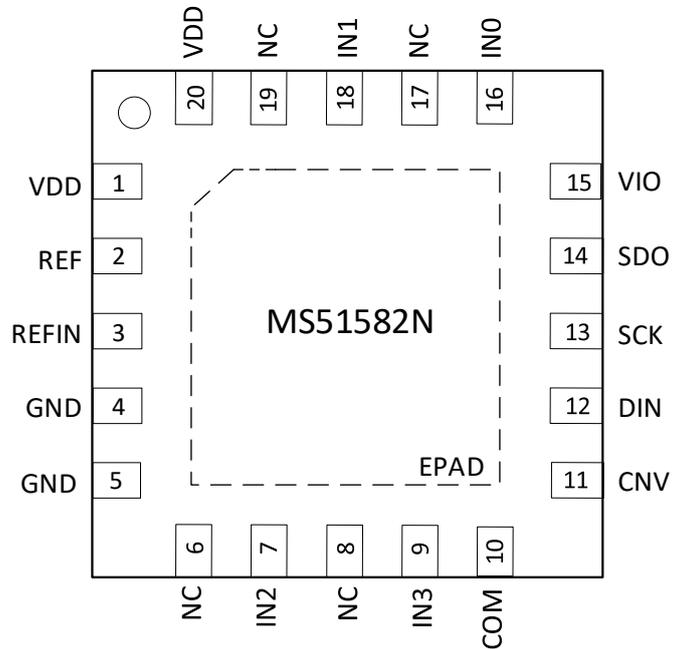
**PIN CONFIGURATION**


**PIN DESCRIPTION**

Pin	Name		Type	Description
	MS51582N	MS51589N		
1,20	VDD	VDD	-	<p>Power Supply. Nominal value is from 2.3V to 5.5V when using external reference and decoupled with 10<math>\mu</math>F and 100nF capacitors.</p> <p>The minimum value is 3.0V when using 2.5V internal reference source.</p> <p>The minimum value is 4.5V when using 4.096V internal reference source.</p>
2	REF	REF	I/O	<p>Reference Voltage Input/Output. A 10<math>\mu</math>F decoupling capacitor is required.</p> <p>When enabling internal reference source, 2.5V or 4.096V referenced voltage outputs on the pin. When the internal reference source is disabled and the internal buffer is enabled, the external reference voltage of REFIN outputs on the REF through buffer.</p>
3	REFIN	REFIN	I/O	<p>Internal Reference Output/Reference Voltage Buffer Input.</p> <p>When internal reference source is used, the internal output is unbuffered reference voltage and a 0.1<math>\mu</math>F decoupling capacitor is required. When the internal reference voltage buffer is enabled, a reference source from 0.5V to (VDD-0.5V) can be applied and buffered to the REF pin.</p>
4	GND	GND	-	Ground
5	GND	GND	-	Ground
6	NC	IN4	I	<p>MS51582N: No Connection</p> <p>MS51589N: Analog Input Channel 4</p>
7	IN2	IN5	I	<p>MS51582N: Analog Input Channel 2</p> <p>MS51589N: Analog Input Channel 5</p>

Pin	Name		Type	Description
	MS51582N	MS51589N		
8	NC	IN6	I	MS51582N: No Connection MS51589N: Analog Input Channel 6
9	IN3	IN7	I	MS51582N: Analog Input Channel 3 MS51589N: Analog Input Channel 7
10	COM	COM	I	Common-mode Channel Input. All input channels (IN7~IN0) can be referred to a common-mode point of 0V or $V_{REF}/2V$ .
11	CNV	CNV	I	Conversion Input. CNV initiates the conversion on the rising edge. During the conversion, if CNV remains low, the busy indicator is enabled.
12	DIN	DIN	I	Data Input. Used to write to 14-bit configuration register. The configuration register can be written during and after conversion.
13	SCK	SCK	I	Serial Data Clock Input.
14	SDO	SDO	O	Serial Data Output.
15	VIO	VIO	-	Input/Output Interface Digital Power Supply. The nominal power supply is same as the master interface. (1.8V, 2.5V, 3V or 5V).
16	IN0	IN0	I	Analog Input Channel 0
17	NC	IN1	I	MS51582N: No Connection MS51589N: Analog Input Channel 1
18	IN1	IN2	I	MS51582N: Analog Input Channel 1 MS51589N: Analog Input Channel 2
19	NC	IN3	I	MS51582N: No Connection MS51589N: Analog Input Channel 3
-	EPAD	EPAD	-	Exposed pad, Connected to the GND is recommended.

**BLOCK DIAGRAM**

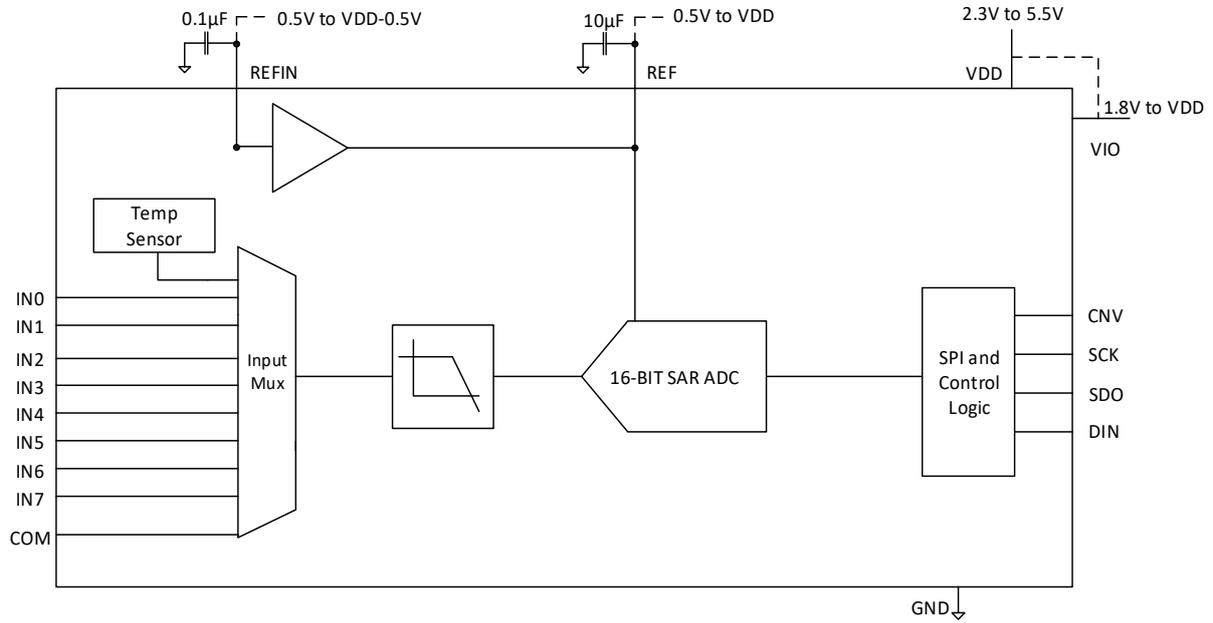

**ABSOLUTE MAXIMUM RATINGS**

Any exceeding absolute maximum rating application causes permanent damage to device. Because long-time absolute operation state affects device reliability. Absolute ratings just conclude from a series of extreme tests. It doesn't represent chip can operate normally in these extreme conditions.

Parameter	Symbol	Range	Unit
Power Supply	$V_{DD}$	-0.3 ~ +7.0	V
Analog Input Voltage	$V_{IN}$	-0.3 ~ $V_{DD}+0.3$	V
Reference Voltage	$V_{REFIN}$	-0.3 ~ $V_{DD}+0.3$	V
Digital Input Voltage		-0.3 ~ $V_{IO}+0.3$	V
Digital Output Voltage		-0.3 ~ $V_{IO}+0.3$	V
Input Current		10	mA
Operating Temperature	$T_A$	-40 ~ 125	°C
Storage Temperature	$T_{STG}$	-65 ~ 150	°C
Lead Temperature (10s)		260	°C
ESD (HBM)	$V_{ESD}$	±2500	V
ESD (CDM)		±500	

**ELECTRICAL CHARACTERISTICS**
 $V_{DD}=2.3V$  to  $5.5V$ ,  $V_{IO}=1.8V$  to  $V_{DD}$ , reference voltage( $V_{REF}$ )= $V_{DD}$ ,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ .


Parameter	Condition	Min	Typ	Max	Unit
<b>Analog Input</b>					
Analog Input Voltage	Unipolar mode	0		$+V_{REF}$	V
	Bipolar mode	$-V_{REF}/2$		$+V_{REF}/2$	
Absolute Input Voltage	Positive input, unipolar and bipolar modes	-0.1		$V_{REF}+0.1$	V
	Negative or COM input, unipolar mode	-0.1		+0.1	V
	Negative or COM input, bipolar mode	$V_{REF}/2-0.1$	$V_{REF}/2$	$V_{REF}/2+0.1$	V
Analog Input CMRR	$f_{IN}=200kHz$		68		dB
Leakage Current@25°C	Acquisition phase		1		nA
<b>Conversion Rate</b>					
Full Bandwidth	$V_{DD}=4.5V$ to $5.5V$	0		250	kSPS
	$V_{DD}=2.3V$ to $4.5V$	0		200	kSPS
1/4 Bandwidth	$V_{DD}=4.5V$ to $5.5V$	0		62.5	kSPS
	$V_{DD}=2.3V$ to $4.5V$	0		50	kSPS
Transient Response	Full-scale step, full bandwidth			2	$\mu s$
	Full-scale step, 1/4 bandwidth			12	$\mu s$
<b>Accuracy</b>					
No Missing Codes			16		Bits
INL	reference voltage( $V_{REF}$ ) = 2.048V	-1.5	$\pm 0.5$	+1.5	LSB
DNL	reference voltage( $V_{REF}$ ) = 2.048V	-1	$\pm 0.25$	+1	LSB
Transition Noise	$V_{REF}=V_{DD}=5V$		0.5		LSB
Gain Error		-8	$\pm 1$	+8	LSB
Gain Error Match		-4	$\pm 0.5$	+4	LSB
Gain Error Temperature Drift			$\pm 1$		ppm/ $^{\circ}C$

Parameter	Condition	Min	Typ	Max	Unit
Offset Error	$V_{DD}=4.5V$ to $5.5V$	-8	$\pm 1$	+8	LSB
	$V_{DD}=2.3V$ to $4.5V$		$\pm 5$		LSB
Offset Error Match		-4	$\pm 0.5$	+4	LSB
Offset Error Temperature Drift			$\pm 1$		ppm/ $^{\circ}C$
Power Supply Sensitivity	$V_{DD}=5V \pm 5\%$		$\pm 1.5$		LSB
<b>AC Accuracy</b>					
SNR	$f_{IN}=20kHz, V_{REF}=5V$	92.5	93.5		dB
	$f_{IN}=20kHz, V_{REF}=5V$	91	92.5		
	$f_{IN}=20kHz, V_{REF}=5V, -60dB$ input		33.5		
THD	$f_{IN}=20kHz$		-100		dB
SFDR	$f_{IN}=20kHz$		110		dB
Crosstalk between Channels	$f_{IN}=100kHz$		-125		dB
<b>Sampling Dynamics</b>					
-3dB Input Bandwidth	Full bandwidth		1.6		MHz
	1/4 bandwidth		0.4		MHz
Aperture Delay	$V_{DD}=5V$		2.5		ns
<b>External Reference Voltage</b>					
Voltage Range	REF input	0.5		$V_{DD}+0.3$	V
	REFIN input	0.5		$V_{DD}-0.5$	V
Leakage Current	200kSPS, $V_{REF}=5V$		50		$\mu A$
<b>Temperature Sensor</b>					
Output Voltage			320		mV
Temperature Sensitivity	@ $25^{\circ}C$		1		mV/ $^{\circ}C$
<b>Digital Input</b>					
Low-level Input Voltage		-0.3		$+0.3 \times V_{IO}$	V
High-level Input Voltage		$0.7 \times V_{IO}$		$V_{IO}+0.3$	V

Parameter	Condition	Min	Typ	Max	Unit
Low-level Input Current		-1		+1	μA
High-level Input Current		-1		+1	μA
<b>Digital Output</b>					
High-level Output Voltage	I <sub>SOURCE</sub> =-500μA	V <sub>IO</sub> -0.3			V
Low-level Output Voltage	I <sub>SINK</sub> =+500μA			0.4	V
Output Leakage Current				80	mA
<b>Power Supply</b>					
VDD	Specified Performance	2.3		5.5	V
VIO	Specified Performance	1.8		V <sub>DD</sub> +0.3	V
Standby Current	V <sub>DD</sub> =V <sub>IO</sub> =5V,25°C		50		nA
Operating Current	V <sub>DD</sub> =2.5V, 100kSPS Conversion Rate		0.7		mA
	V <sub>DD</sub> =2.5V, 200kSPS Conversion Rate		1.4		
	V <sub>DD</sub> =5V, 200kSPS Conversion Rate		2.5	3	

**PACKAGE OUTLINE DIMENSIONS**


**QFN20**

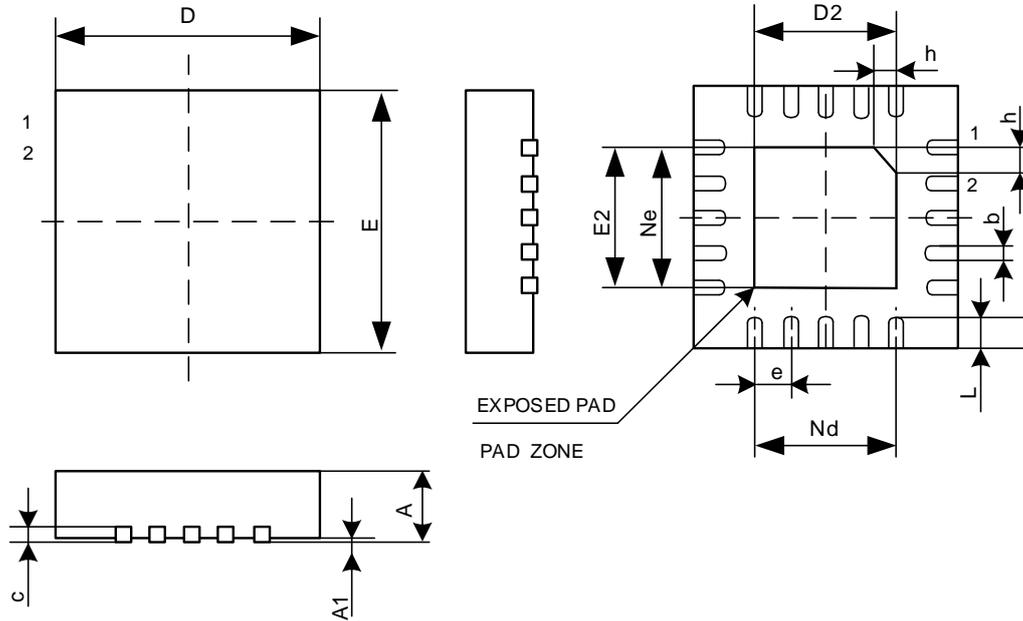

Symbol	Dimensions in Millimeters		
	Min	Typ	Max
A	0.70	0.75	0.80
A1	-	0.02	0.05
b	0.18	0.25	0.30
c	0.18	0.20	0.25
D	3.90	4.00	4.10
D2	1.90	2.00	2.10
e	0.50BSC		
Ne	2.00BSC		
Nd	2.00BSC		
E	3.90	4.00	4.10
E2	1.90	2.00	2.10
L	0.35	0.40	0.45
h	0.25	0.30	0.35

**MARKING and PACKAGING SPECIFICATION**

**1. Marking Drawing Description**

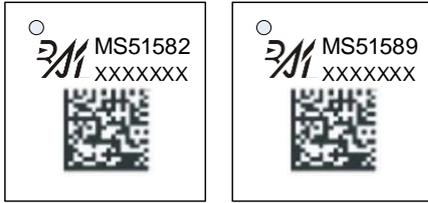

Product Name: MS51582, MS51589

Product Code: XXXXXXXX

**2. Marking Drawing Demand**

Laser printing, contents in the middle, font type Arial.

**3. Packaging Specification**

Device	Package	Piece/Reel	Reel/Box	Piece/Box	Box/Carton	Piece/Carton
MS51582N	QFN20	1000	8	8000	4	32000
MS51589N	QFN20	1000	8	8000	4	32000

**STATEMENT**

- All Revision Rights of Datasheets Reserved for Ruimeng. Don't release additional notice.  
Customer should get latest version information and verify the integrity before placing order.
- When using Ruimeng products to design and produce, purchaser has the responsibility to observe safety standard and adopt corresponding precautions, in order to avoid personal injury and property loss caused by potential failure risk.
- The process of improving product is endless. And our company would sincerely provide more excellent product for customer.

**MOS CIRCUIT OPERATION PRECAUTIONS**

Static electricity can be generated in many places. The following precautions can be taken to effectively prevent the damage of MOS circuit caused by electrostatic discharge:

1. The operator shall ground through the anti-static wristband.
2. The equipment shell must be grounded.
3. The tools used in the assembly process must be grounded.
4. Must use conductor packaging or anti-static materials packaging or transportation.



+86-571-89966911



Rm701, No.9 Building, No. 1 WeiYe Road, Puyan Street, Binjiang District, Hangzhou, Zhejiang



[http:// www.relmon.com](http://www.relmon.com)