


## Spurious-free, 2.1GHz, Single-loop Fractional-N Frequency Synthesizer

### PRODUCT DESCRIPTION


The MS72310/MS72310N1 is a single-loop, fractional-N frequency synthesizer, which is featured with high frequency resolution, fast switching speed of output frequency and low phase-noise. The maximum operation frequency is 2.1GHz, which is suitable for wireless communication system. The MS72310/MS72310N1 adopts three-wire high-speed serial interface, combined with large loop bandwidth and high frequency resolution, the external VCO is allowed for frequency modulation. Its characteristics is suitable for any modulation schemes with continuous phase and constant envelope, such as Frequency Modulation(FM), Frequency Shift Keying(FSK), Minimum Shift Keying(MSK) and Gaussian Minimum Shift Keying(GMSK).

### FEATURES

- Spurious-free Operation
- Maximum Operation Frequency: 2.1GHz
- High Frequency Resolution: below 100Hz
- High Internal Reference Frequency, Support Large Loop Bandwidth.
- Fast Output Frequency Switching: below 100μs
- Phase Noise inside the Loop Bandwidth  
-91dBc/Hz@1800MHz
- Software Programmable Power-down Modes
- High-speed Serial Interface: 100Mbps
- Three-wire SPI interface
- Programmable Division Ratios on Reference Frequency
- Phase Detectors with Programmable Gain  
Support Programmable Loop Bandwidth.
- Fast Lock Function Further Shortens Acquisition Time.
- On-chip Crystal Oscillator Circuit
- 3V Core Power Supply
- 3V~5V Charge Pump Power Supply



QFN24



QFN20



### APPLICATIONS

- General RF Systems
- 2.5G/3G Wireless Infrastructure
- Broadband Wireless Access
- Wireless Telemetry with Low Bit Rate
- Instrumentation
- L-band Receivers
- Satellite Communications

### PRODUCT SPECIFICATION

Part Number	Package	Marking
MS72310	QFN24	MS72310
MS72310N1	QFN20	MS72310N1

## PIN CONFIGURATION

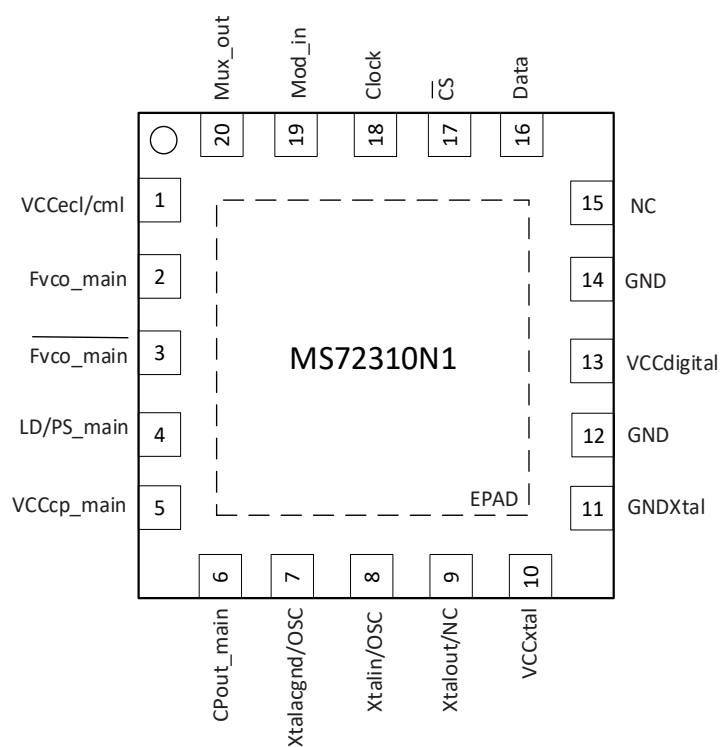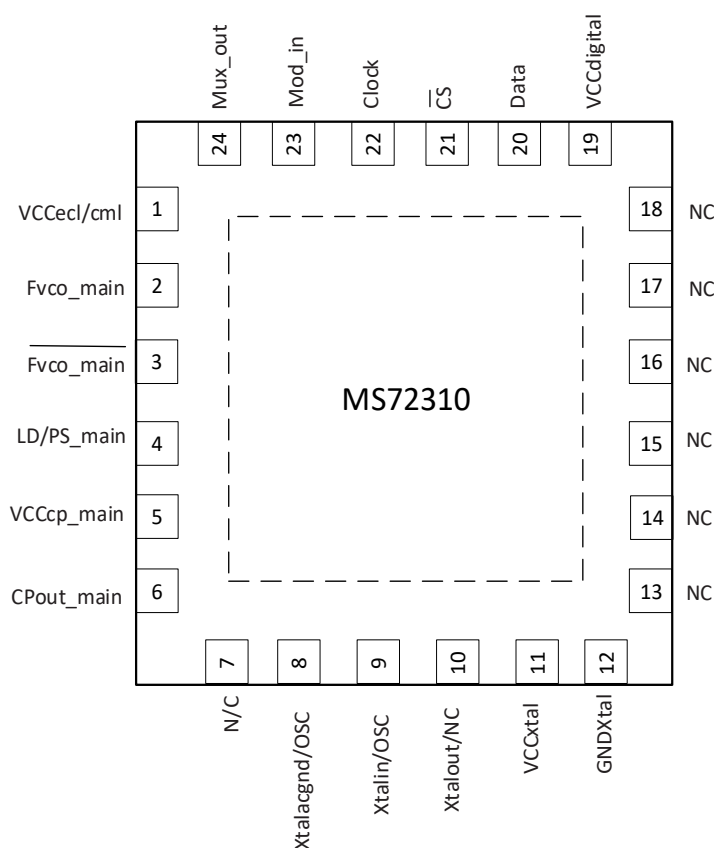

## PIN DESCRIPTION

### MS72310

Pin	Name	Type	Description
1	VCCecl/cml	-	ECL/CML Power Supply
2	Fvco_main	I	Main VCO Differential Positive Input.
3	$\overline{\text{Fvco\_main}}$	I	Main VCO Differential Negative Input.
4	LD/PS_main	O	Programmable Output Pin: lock detection or fast lock enabling. The pin is configured by using the phase detector /charge pump control register. When the corresponding bit of this register is 0, this pin serves as lock detection, and the collector is in open-circuit output state. When in low level, it indicates loss of lock. When in high level, it indicates lock; When the corresponding bit of this register is 1, this pin serves as fast lock enabling.
5	VCCcp_main	-	Charge Pump Power Supply
6	CPout_main	O	Charge Pump Output. The gain of charge pump/phase detector is configured by phase detector/charge pump control register.
7	NC	-	No Connection
8	Xtalacgnd/OSC	-/I	Reference Crystal AC Ground or External Crystal Oscillator Differential Input
9	Xtalin/OSC	I	Reference Crystal Input or External Crystal Oscillator Differential Input
10	Xtalout/NC	O/-	Reference Crystal Output or No Connection
11	VCCxtal	-	Crystal Power Supply
12	GNDxtal	-	Crystal Ground
13	NC	-	No Connection
14	NC	-	No Connection
15	NC	-	No Connection
16	NC	-	No Connection
17	NC	-	No Connection
18	NC	-	No Connection
19	VCCdigital	-	Digital Power Supply


Pin	Name	Type	Description
20	Data	I	Serial Address and Data Input Pin. Address bits are followed by data bits.
21	$\overline{\text{CS}}$	I	Low Active Enable Pin. Address and data are loaded to Data pin on the rising edge of Clock pin. When $\overline{\text{CS}}$ is high, data is transferred to the register specified by the address, subsequent clock edges are ignored.
22	Clock	I	Clock Pin. When $\overline{\text{CS}}$ is low, register address and data are transferred to register on the rising edge of Clock (Address bits are shifted firstly)
23	Mod_in	I	Selectable Serial Modulation Data Input Pin. Address bits are followed by data bits.
24	Mux_out	O	Internal Multiplexer Output Pin. Selectable output oscillator clock, reference frequency batch clock, divided VCO clock, serial data or test signals. This pin can control tri-state output by synthesizer register.

**MS72310N1**

Pin	Name	Type	Description
1	VCCec/cml	-	ECL/CML Power Supply
2	Fvco_main	I	Main VCO Differential Positive Input.
3	$\overline{\text{Fvco\_main}}$	I	Main VCO Differential Negative Input.
4	LD/PS_main	O	Programmable Output Pin: lock detection or fast lock enabling. The pin is configured by using the phase detector /charge pump control register. When the corresponding bit of this register is 0, this pin serves as lock detection, and the collector is in open-circuit output state. When in low level, it indicates loss of lock. When in high level, it indicates lock; When the corresponding bit of this register is 1, this pin serves as fast lock enabling.
5	VCCcp_main	-	Charge Pump Power Supply
6	CPout_main	O	Charge Pump Output. The gain of charge pump/phase detector is configured by phase detector/charge pump control register.

Pin	Name	Type	Description
7	Xtalacgnd/OSC	-/I	Reference Crystal AC Ground or External Crystal Oscillator Differential Input
8	XtalIn/OSC	I	Reference Crystal Input or External Crystal Oscillator Differential Input
9	Xtalout/NC	O/-	Reference Crystal Output or No Connection
10	VCCxtal	-	Crystal Power Supply
11	GNDxtal	-	Crystal Ground
12	GND	-	Ground
13	VCCdigital	-	Digital Power Supply
14	GND	-	Ground
15	NC	-	No Connection
16	Data	I	Serial Address and Data Input Pin. Address bits are followed by data bits.
17	$\overline{CS}$	I	Low Active Enable Pin. Address and data are loaded to Data pin on the rising edge of Clock pin. When $\overline{CS}$ is high, data is transferred to the register specified by the address, subsequent clock edges are ignored.
18	Clock	I	Clock Pin. When $\overline{CS}$ is low, register address and data are transferred to register on the rising edge of Clock (Address bits are shifted firstly)
19	Mod_in	I	Selectable Serial Modulation Data Input Pin. Address bits are followed by data bits.
20	Mux_out	O	Internal Multiplexer Output Pin. Selectable output oscillator clock, reference frequency batch clock, divided VCO clock, serial data or test signals. This pin can control tri-state output by synthesizer register.
-	EPAD	-	Must be Grounded.

## BLOCK DIAGRAM

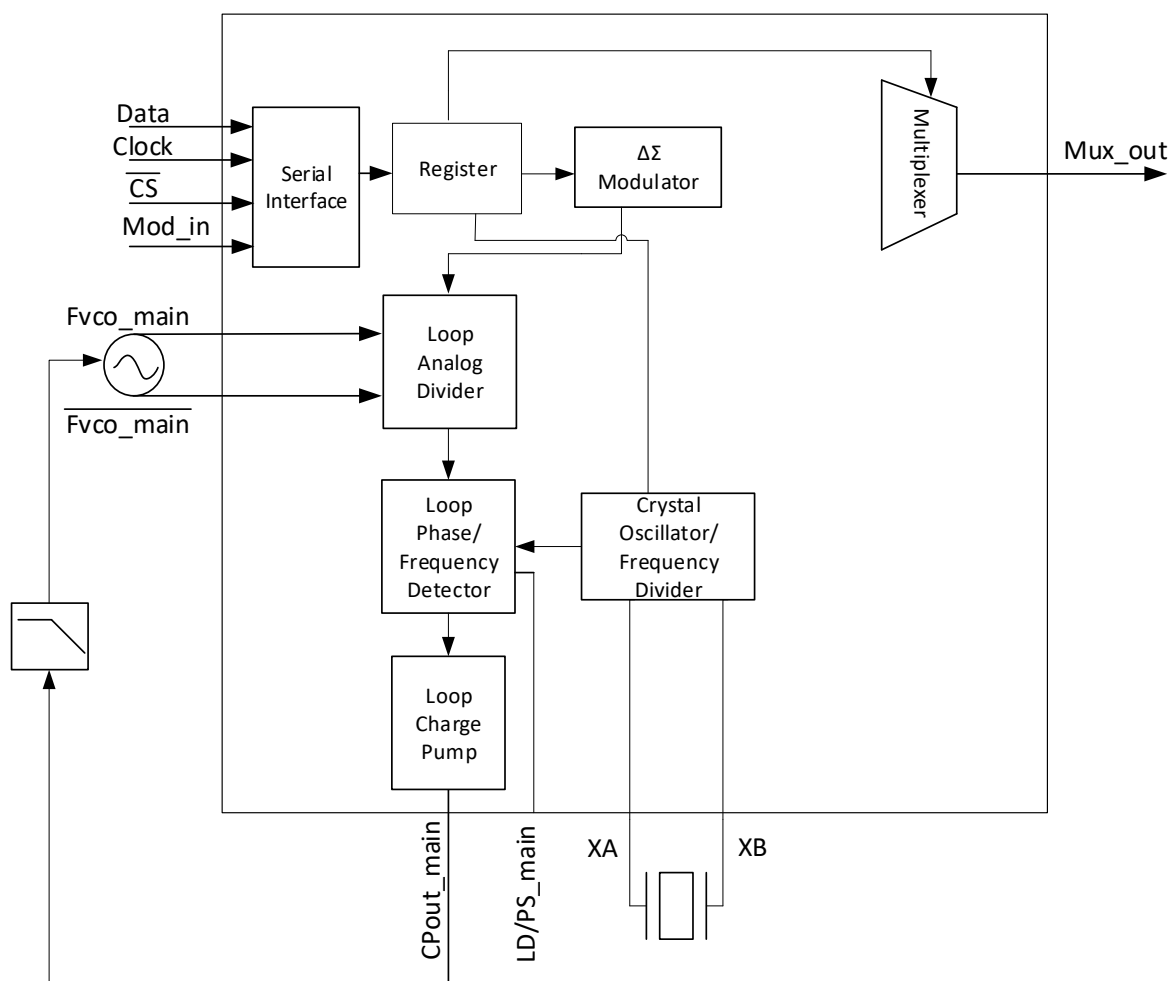

## ABSOLUTE MAXIMUM RATINGS

Any exceeding absolute maximum rating application causes permanent damage to device. Because long-time absolute operation state affects device reliability. Absolute ratings just conclude from a series of extreme tests. It doesn't represent chip can operate normally in these extreme conditions.

Parameter	Symbol	Range	Unit
Maximum Analog RF Supply Voltage		3.6	V
Maximum Digital Supply Voltage		3.6	V
Maximum Charge Pump Supply Voltage		5.5	V
Storage Temperature	T <sub>STG</sub>	-65 ~ +150	°C
Operating Temperature	T <sub>A</sub>	-40 ~ 125	°C
Soldering Temperature (10s)		260	°C

## RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Range			Unit
		Min	Typ	Max	
Analog RF Power Supply		2.7	3	3.3	V
Power Supply of Crystal Oscillator Circuit		2.7	3	3.3	V
Digital Power Supply		2.7	3	3.3	V
Charge Pump Power Supply		2.7		5.25	V
Operating Temperature	T <sub>A</sub>	-40	25	125	°C

## ELECTRICAL CHARACTERISTICS

Unless otherwise noted, Power Supply: 3V, Operating Temperature: 25°C.

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Power Dissipation						
Total Power Dissipation	P <sub>TOTAL</sub>	Charge-pump Current: 200μA, fractional synthesizer, Fref_main = 20MHz		25.5		mW
Power-down Current	I <sub>CC-PWDN</sub>	3V Charge Pump		0.82		mA
		5V Charge Pump		1.01		mA
Reference Oscillator						
Reference Oscillator Frequency	f <sub>OSC</sub>				50	MHz
Oscillator Sensitivity (As a Buffer)	V <sub>OSC</sub>	AC Coupled, Single-ended	0.05		0.4	V <sub>pp</sub>
Frequency Shift VS. Voltage	f <sub>SHIFT_SUPPLY</sub>	2.7V ≤ V <sub>XTAL</sub> ≤ 3.3V	-0.5		0.5	ppm
Voltage Controlled Oscillator VCO						
Main Synthesizer Operating Frequency	f <sub>VCO_MAIN</sub>	Sinusoidal, -40°C to 125 °C	100 <sup>(1)</sup>		2100	MHz
RF Input Sensitivity	V <sub>VCO</sub>	AC Coupled	50		350	mV <sub>peak</sub>
RF Input Resistance	Z <sub>VCO_IN</sub>	Single-ended		58-j70 @1200MHz		Ω
Fractional-N Frequency Resolution	f <sub>STEP_MAIN</sub>		Fref_main/2 <sup>18</sup> or Fref_main/2 <sup>10</sup>			Hz



Unless otherwise noted, Power Supply: 3V, Operating Temperature: 25°C.

Parameter	Symbol	Condition	Min	Typ	Max	Unit
<b>Noise</b>						
Phase Noise Floor	$P_{nf}$	Using 25MHz Reference Frequency, inside the Loop Bandwidth		-131 $+20\log(N)^{(2)}$		dBc/ Hz
<b>Phase Detectors and Charge Pumps</b>						
Phase Detectors Operating Frequency	$f_{ref\_main}$	-40°C to +85°C			25	MHz
Charge-pump Source Current	$I_{CP\_SOURCE}$	$V_{CP} = 0.5 V_{CCCP}$	100		800	μA
Charge-pump Sink Current	$I_{CP\_SINK}$	$V_{CP} = 0.5 V_{CCCP}$	-100		-800	μA
Charge-pump Accuracy	$I_{CP\_ACCURACY}$				±25	%
Charge-pump Output Voltage Linear Range	$I_{CP}$ VS. $V_{CP}$	$0.5 V \leq V_{CP} \leq (V_{CCCP} - 0.5 V)$	GND+ 400		$V_{CCCP}$ -400	mV
Charge-pump Current VS. Temperature	$I_{CP}$ VS. $T$	$V_{CP} = 0.5 V_{CCCP}$ -40°C to +85°C			5	%
Charge-pump Current VS. Voltage	$I_{CP}$ VS. $V_{CP}$	$0.5 V \leq V_{CP} \leq (V_{CCCP} - 0.5 V)$			8	%

Unless otherwise noted, Power Supply: 3V, Operating Temperature: 25°C.



Parameter	Symbol	Condition	Min	Typ	Max	Unit
<b>Digital Pins</b>						
High-level Input Voltage	$V_{IH}$		$0.7 \times V_{DIGITAL}$			V
Low-level Input Voltage	$V_{IL}$				$0.3 \times V_{DIGITAL}$	V
High-level Output Voltage	$V_{OH}$	$I_{OH} = -2mA$	$V_{DIGITAL} - 0.2$			V

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Low-level Output Voltage	$V_{OL}$	$I_{OL}=+2mA$			GND+0.2	V
<b>Timing-serial Interface</b>						
Clock Frequency	$f_{CLOCK}$	Clock Pin			100	MHz
Set-up Time	$t_{SU}$	Time for Data and $\overline{CS}$ to Remain Unchanged before the Rising Edge of CLOCK	3			ns
Hold Time	$t_{HOLD}$	Time for Data and $\overline{CS}$ to Remain Unchanged after the Rising Edge of CLOCK	1			ns

Note:


- (1) The minimum synthesizer frequency is  $12 \times f_{OSC}$ ,  $f_{OSC}$  is the clock frequency on the  $X_{talin}/OSC$  pin.
- (2) N is the synthesizer division ratio.

## TYPICAL APPLICATION

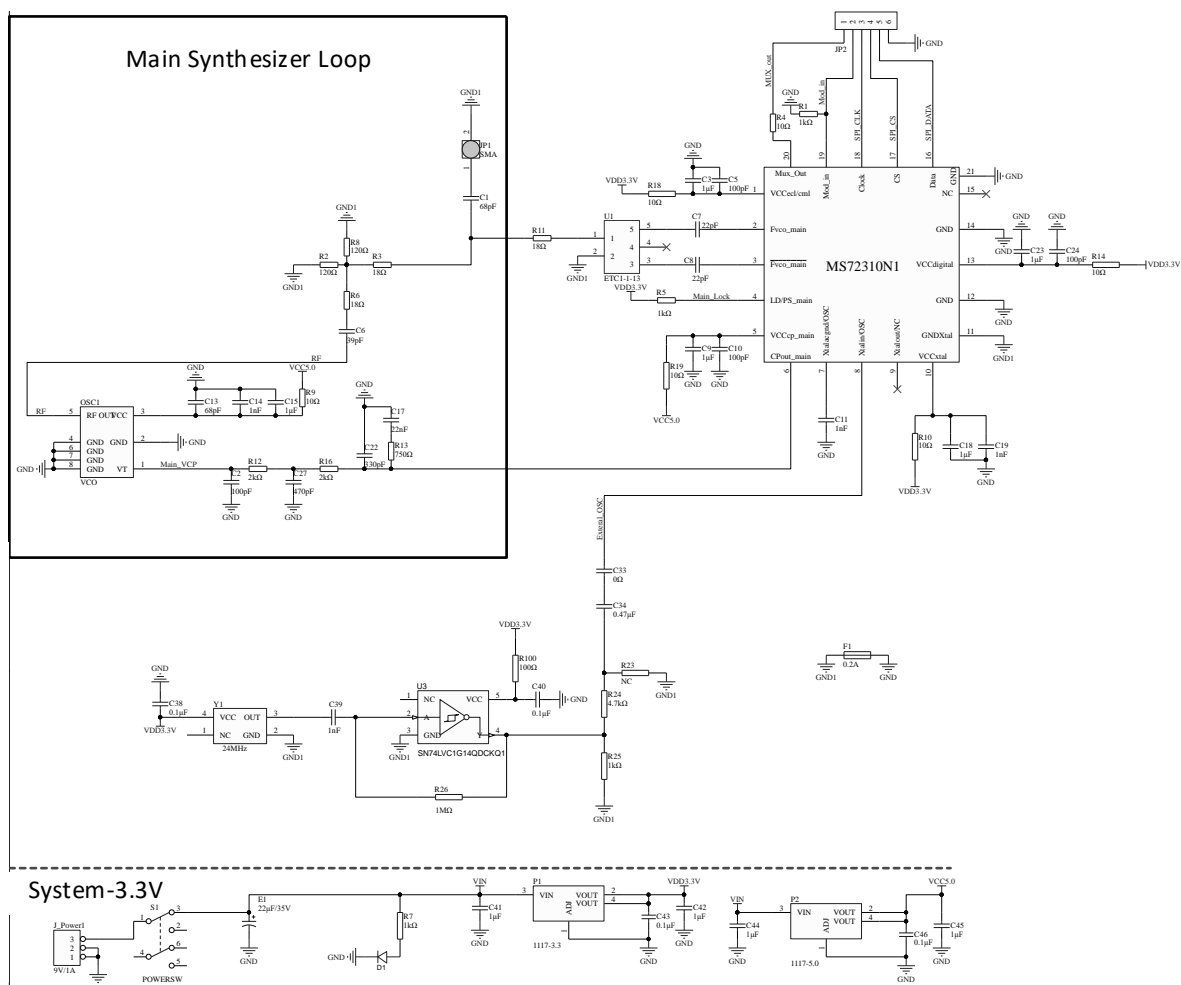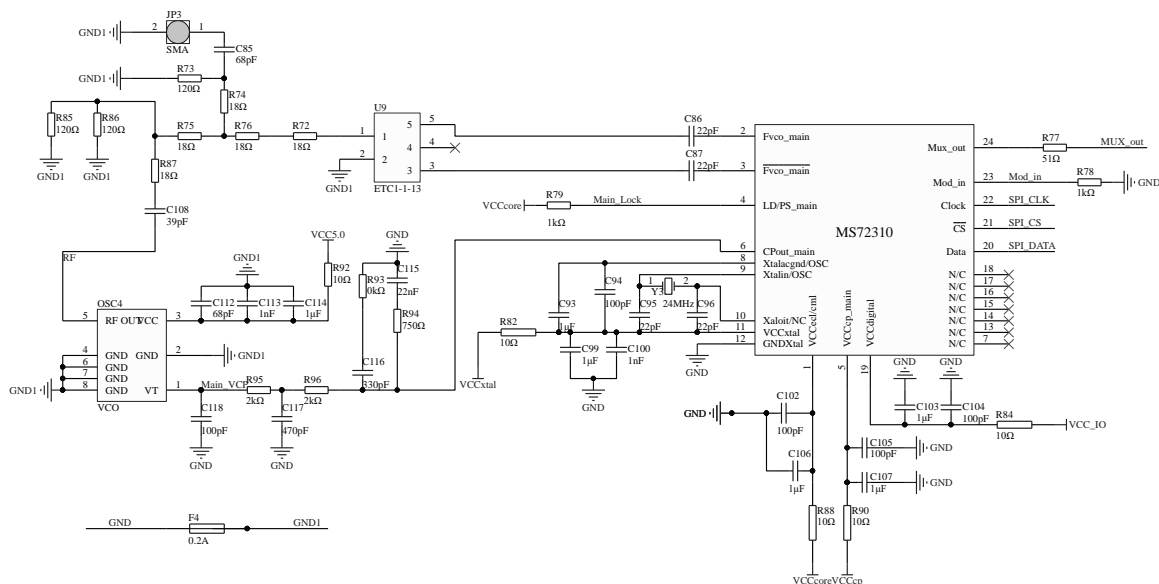


# PACKAGE OUTLINE DIMENSIONS

## QFN24

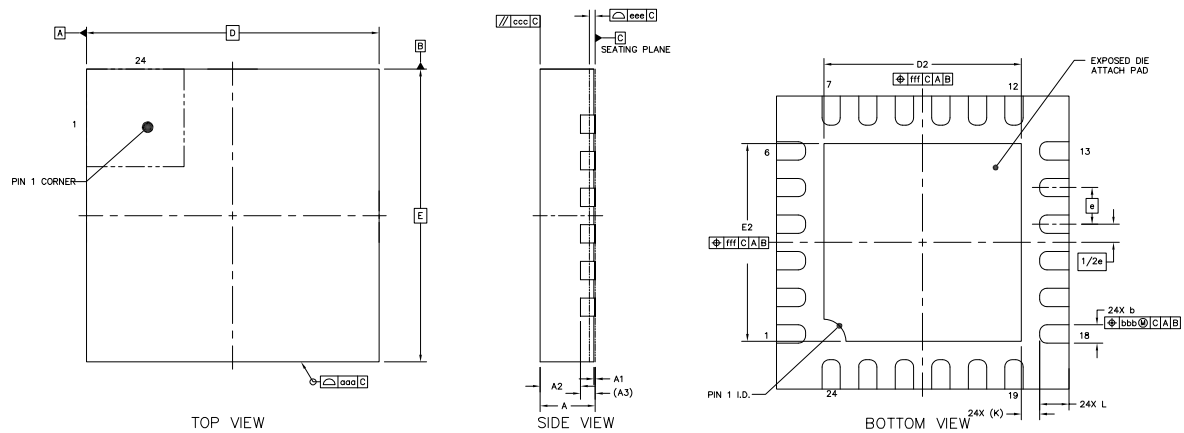

Symbol	Dimensions in Millimeters		
	Min	Typ	Max
A	0.7	0.75	0.8
A1	0	0.02	0.05
A2	-	0.55	-
A3	0.203REF		
b	0.2	0.25	0.3
D	4BSC		
E	4BSC		
e	0.5BSC		
D2	2.6	2.7	2.8
E2	2.6	2.7	2.8
L	0.3	0.4	0.5
K	0.2min		
aaa	0.1		
ccc	0.1		
eee	0.08		
bbb	0.1		
fff	0.1		


## QFN20

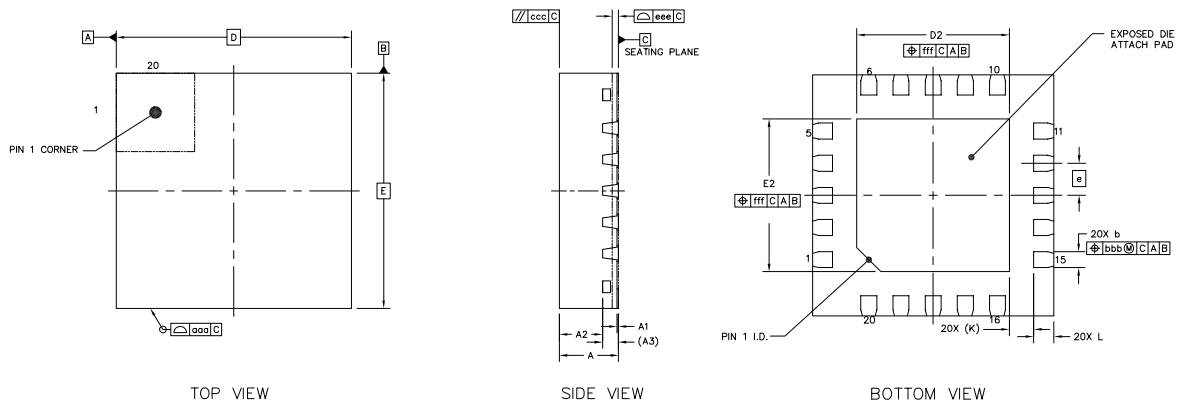

Symbol	Dimensions in Millimeters		
	Min	Typ	Max
A	0.7	0.75	0.8
A1	0	0.02	0.05
A2	-	0.55	-
A3	0.203REF		
b	0.15	0.2	0.25
D	3BSC		
E	3BSC		
e	0.4BSC		
D2	1.8	1.9	2
E2	1.8	1.9	2
L	0.15	0.25	0.35
K	0.3REF		
aaa	0.1		
ccc	0.1		
eee	0.08		
bbb	0.07		
fff	0.1		

## MARKING and PACKAGING SPECIFICATIONS

### 1. Marking Drawing Description

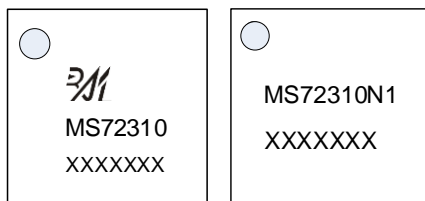

Product Name: MS72310, MS72310N1

Product Code: XXXXXXX

### 2. Marking Drawing Demand

Laser printing, contents in the middle, font type Arial.

### 3. Packaging Specification

Device	Package	Piece/Reel	Reel/Box	Piece/Box	Box/Carton	Piece/Carton
MS72310	QFN24	4000	1	4000	8	32000
MS72310N1	QFN20	1000	8	8000	4	32000

**STATEMENT**

- All Revision Rights of Datasheets Reserved for Ruimeng. Don't release additional notice.  
Customer should get latest version information and verify the integrity before placing order.
- When using Ruimeng products to design and produce, purchaser has the responsibility to observe safety standard and adopt corresponding precautions, in order to avoid personal injury and property loss caused by potential failure risk.
- The process of improving product is endless. And our company would sincerely provide more excellent product for customer.

**MOS CIRCUIT OPERATION PRECAUTIONS**

Static electricity can be generated in many places. The following precautions can be taken to effectively prevent the damage of MOS circuit caused by electrostatic discharge:

1. The operator shall ground through the anti-static wristband.
2. The equipment shell must be grounded.
3. The tools used in the assembly process must be grounded.
4. Must use conductor packaging or anti-static materials packaging or transportation.



+86-571-89966911



Rm701, No.9 Building, No. 1 WeiYe Road, Puyan Street, Binjiang District, Hangzhou, Zhejiang



[http:// www.relmon.com](http://www.relmon.com)